

## CÂBLES D'ENCEINTES MONTÉS

OPÉRA OS25A avec fiches bananes

Pensé comme une solution simple et efficace pour accompagner tout système audio, les câbles d'enceintes prémontés OPÉRA OS25A se présentent comme une liaison fiable et soignée entre votre amplificateur et vos enceintes passives.

LONGUEUR  
DISPONIBLE

2x2,5m



Doté d'une section totale de 2x2,5mm<sup>2</sup>, le conducteur est constitué de cuivre désoxygéné OFC (Oxygen Free Copper), recouvert d'une fine couche d'étain. Ce traitement limite naturellement l'oxydation du métal, tout en assurant une transmission stable du signal. La structure et le tressage des brins induisent un sens de conductivité, la gaine est donc fléchée respectant le sens du signal, de votre amplificateur vers vos enceintes.

La gaine extérieure en PVC permet une isolation efficace ainsi qu'une protection mécanique du conducteur. Ce matériau présente aussi l'avantage d'une bonne flexibilité afin de rendre la mise en place simple.

Disponible en longueurs de 2,5 mètres, cette paire de câbles est équipée de connecteurs types banane TRIANGLE BP450, permettant un branchement simple, rapide et sécurisé.

Ces câbles sont montés avec des connecteurs type banane BP450 reprenant le diamètre des borniers de 4mm pour assurer une compatibilité maximale. Ils garantissent une mise en place facile avec un contact fiable et leur placage or offre une protection contre l'oxydation.

Les câbles OPÉRA montés OS25A sont la solution idéale pour compléter ou améliorer votre installation Hi-Fi et Home-Cinéma tout en restant accessible.



## SPÉCIFICATIONS TECHNIQUES


**DOUBLE GAINÉ PVC  
TRANSPARENT FUMÉE**

**SECTION DE CUIVRE**


99,99% OFC  
2,5 mm<sup>2</sup> / 15 AWG x2  
7 tresses de 32 brins (0.12mm)

**FICHES BANANES BP450**


Ø 3,6mm - Placage or

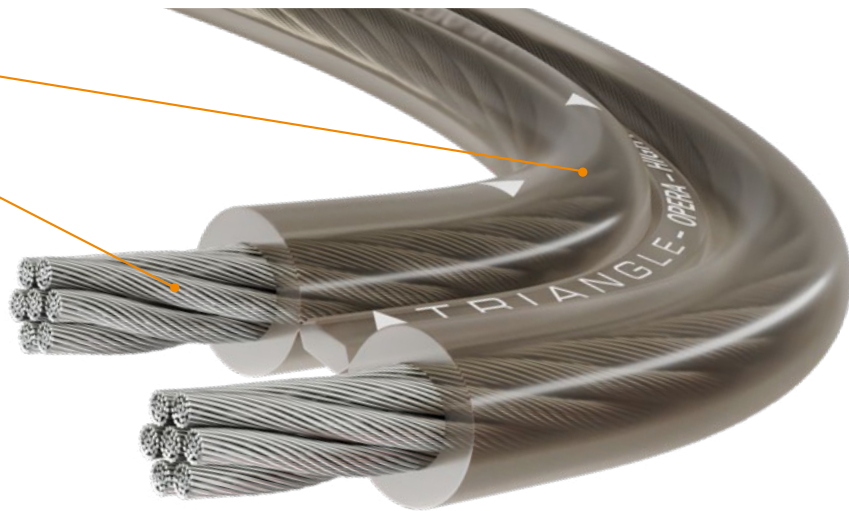

MULTIBRINS



CUIVRE  
DÉSOXYGÉNÉ



FICHES BANANES



SENS DU SIGNAL



BORNES  
PLACAGE OR

INFORMATIONS LOGISTIQUES

Code EAN : 3660216004901

Poids net : **480g**

Dimensions packaging : **L130 x H50 x P290mm**

## OPERA OS25A MOUNTED SPEAKER

*with banana plugs*

Designed as a simple and effective solution for any audio system, OPERA OS25A pre-mounted speaker cables provide a reliable and neat connection between your amplifier and your passive speakers.

AVAILABLE  
LENGTH

2x2,5m



With a total cross-section of  $2 \times 2.5 \text{mm}^2$ , the conductor is made of oxygen-free copper (OFC), covered with a thin layer of tin. This treatment naturally limits metal oxidation while ensuring stable signal transmission.

The structure and braiding of the strands induce a direction of conductivity, so the sheath is marked to indicate the direction of the signal, from your amplifier to your speakers. The outer PVC sheath provides effective insulation and mechanical protection for the conductor. This material also has the advantage of good flexibility, making installation easy.

Available in lengths of 2.5 metres, this pair of cables is equipped with TRIANGLE BP450 banana connectors, allowing for simple, quick and secure connection.

These cables are fitted with BP450 banana connectors with a diameter of 4mm to ensure maximum compatibility. They guarantee easy installation with reliable contact, and their gold plating offers protection against oxidation.

OPERA cables fitted with OS25A connectors are the ideal solution for completing or upgrading your Hi-Fi and home cinema system while remaining affordable.



## TECHNICAL SPECIFICATIONS


**DOUBLE PVC SLEEVE  
TRANSPARENT SMOKE**

**COPPER SECTION**


99,99% OFC  
2,5 mm<sup>2</sup> / 15 AWG x2  
7 braids of 32 strands (0.12mm)

**BANANA PLUGS BP450**


Ø 3,6mm - Gold-plated

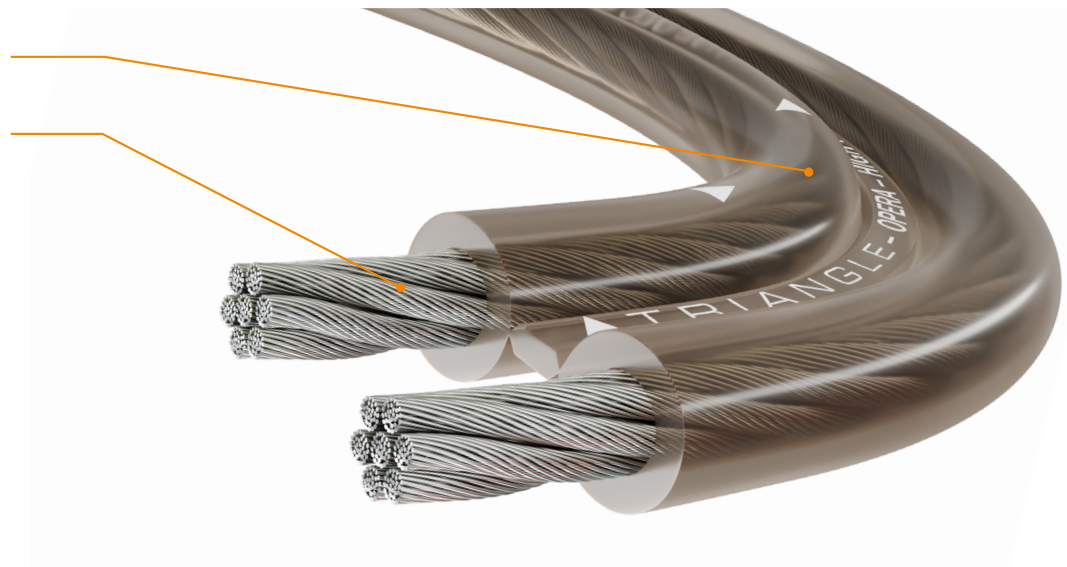

MULTI-STRAND



OXYGEN  
FREE COPPER



BANANA PLUGS



SIGNAL  
DIRECTION



BANANA PLUGS  
GOLD-PLATED

LOGISTICS INFORMATION

Code EAN : 3660216004901

Net Weight : **480g**

Packaging Dimensions : **L130 x H50 x D290mm**