

CÂBLES D'ENCEINTES MONTÉS

avec fiches bananes RED SERIE

Les câbles d'enceintes prémontés RED Serie sont conçus pour optimiser le transport du signal entre votre amplificateur et vos enceintes. La combinaison des matériaux sélectionnés associée à une architecture technique exigeante garantit une restitution fidèle de votre univers musical.

La gamme RED Serie est destinée à des audiophiles exigeants, désireux de préserver la pureté du signal dans une composition Haute-Fidélité.

LONGUEURS
DISPONIBLES

2x3m
2x5m



Doté d'une section totale de 2x2,5mm², l'âme du conducteur est constituée d'un total de 7 tresses composées chacune de 32 brins OFC (Oxygen Free Copper). Ce type de cuivre, issu d'un protocole spécifique assurant l'absence d'oxygène, atteint un niveau de pureté de 99,99%. Il en résulte une transmission fluide et précise du signal.

La structure et le tressage des brins induisent un sens de conductivité, la gaine est donc fléchée respectant le sens du signal, de votre amplificateur vers vos enceintes.

L'isolation s'établit sur deux niveaux distincts :

- L'isolation interne composée d'une triple couche associant coton et PVC souple permettant de préserver les propriétés conductrices tout en limitant les interférences électromagnétiques.
- L'isolation externe composée d'une âme PVC recouverte d'une gaine textile tressée dans un rôle de protection des dommages physiques extérieurs.

Les câbles d'enceintes RED Serie sont prémontés avec des connecteurs type banane, facilitant ainsi votre installation. Le diamètre standard de la fiche (3,6 mm) permet une compatibilité avec l'ensemble du matériel hi-fi disponible. Le placage or recouvrant l'extrémité de la fiche assure une conductivité optimale.

Disponible en longueurs de 3 ou 5 mètres, le câble RED Serie répond aux exigences de la haute-fidélité, il sera le compagnon idéal de vos installations, vous offrant justesse et raffinement.



SPÉCIFICATIONS TECHNIQUES

GAINÉ TISSÉE COTON

ISOLATION PVC

ISOLATION TRIPLE COUCHE

Feuille de COTON

Isolation COTON

Gaine PVC

SECTION DE CUIVRE


99,99% OFC

2,5 mm² / 13 AWG x2

7 tresses de 32 brins

FICHES BANANES BP 450


Ø 3,6mm - Placage or

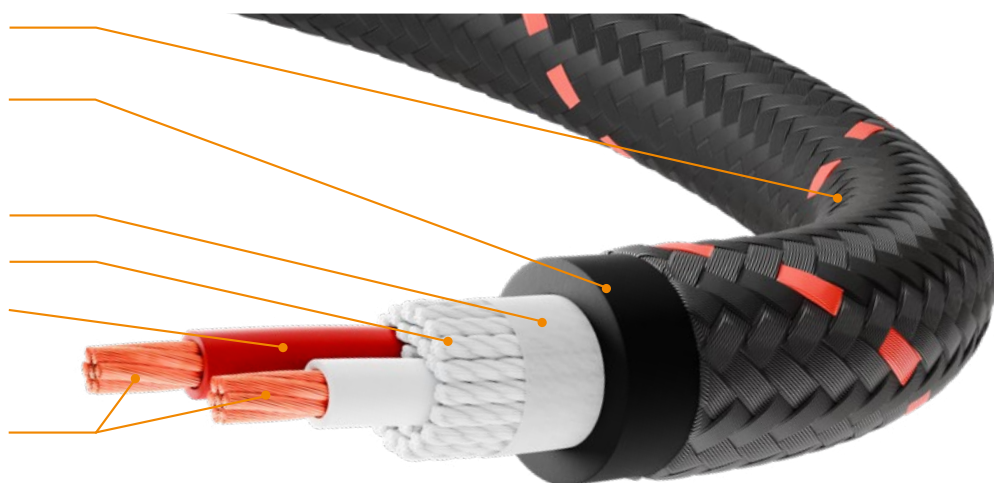


ISOLATION TRIPLE COUCHE



MULTIBRINS




CUIVRE DÉSOXYGÉNÉ



FICHES BANANES



SENS DU SIGNAL



BORNES PLACAGE OR

INFORMATIONS LOGISTIQUES

Code EAN : **3m** - 3660216018182

Code EAN : **5m** - 3660216018212

Poids net : **0,78 kg**

Poids net : **1,21 kg**

Dimensions packaging : **L240 x H240 x P75mm**

MOUNTED SPEAKER CABLES

with RED SERIES banana plugs

RED Series pre-assembled speaker cables are designed to optimize signal transmission between your amplifier and your speakers. The combination of selected materials and sophisticated technical architecture guarantees faithful reproduction of your musical universe.

The RED Series range is designed for demanding audiophiles who want to preserve signal purity in a high-fidelity setup.



AVAILABLE
LENGTHS

2x3m
2x5m



With a total cross-section of $2 \times 2.5 \text{mm}^2$, the conductor core consists of a total of 7 strands, each composed of 32 OFC (Oxygen Free Copper) strands. This type of copper, produced using a specific protocol that ensures the absence of oxygen, achieves a purity level of 99.99%. The result is smooth and accurate signal transmission.

The structure and braiding of the strands induce a sense of conductivity, so the sheath is arrowed to follow the direction of the signal, from your amplifier to your speakers.

The insulation is established on two distinct levels:

- Internal insulation consisting of a triple layer combining cotton and flexible PVC to preserve conductive properties while limiting electromagnetic interference.
- External insulation consisting of a PVC core covered with a braided textile sheath to protect against external physical damage.

RED Series speaker cables are pre-assembled with banana plug connectors, making installation easy. The standard plug diameter (3.6 mm) ensures compatibility with all available hi-fi equipment. The gold plating covering the end of the plug ensures optimal conductivity.

Available in lengths of 3 or 5 metres, the RED Series cable meets high-fidelity requirements and is the ideal companion for your installations, offering accuracy and refinement.



TECHNICAL SPECIFICATIONS

BRAIDED COTTON SHEATH

PVC INSULATION

TRIPLE INSULATION


Cotton Sheet

Cotton insulation

PVC Sheath

COPPER SECTION

99,99% OFC
2,5 mm² / 13 AWG x2
7 braids of 32 strands

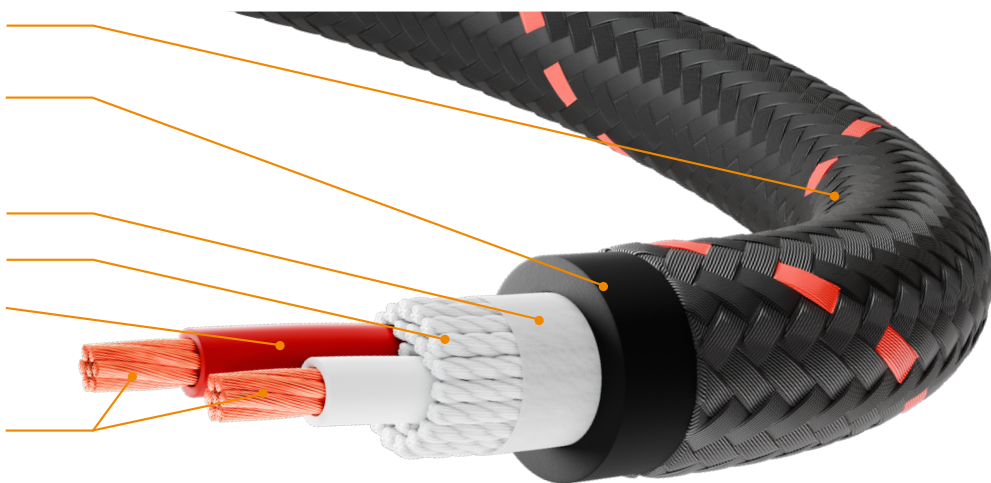

BANANA PLUGS BP 450


Ø 3,6mm - Gold-plated




TRIPLE INSULATION



MULTI-STRAND




OXYGEN FREE COPPER



BANANA PLUGS



SIGNAL DIRECTION



BANANA PLUGS GOLD-PLATED

LOGISTICS INFORMATION

EAN : 3m - 3660216018182

EAN : 5m - 3660216018212

Net Weight: **0,78 kg**

Net Weight: **1,21 kg**

Packaging Dimensions : **L240 x H240 x D75mm**