




Custom O-Type Linear Power Supply



Refreshed UI Experience

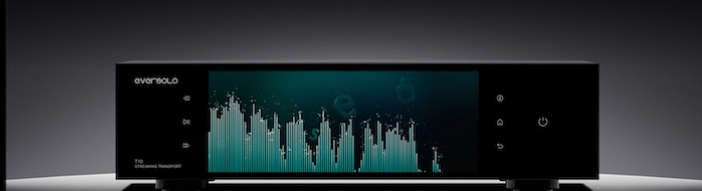

**50Ω**  
10MHz/25MHz

**75Ω**  
10MHz/25MHz

External Clock Inputs



Extensive Electrical Isolation

Up to  
**DSD 512**

**PCM**  
**768kHz / 32bit**



**8GB** + **64GB**  
DDR5 memory eMMC storage



Global Mainstream Streaming Services



OXCO+PLL



Eversolo Control

**8.6"**

8.6" Immersive Art Display

**Octa-Core ARM**

64-bit High-Performance Octa-core Processor



SFP Optical Port



8 IIS Output Modes



**evotune™ PRO**  
Powered With eversolo

Room Correction Pro